


WIRELESS PORTABLE RADIO SPEAKER


Model: BTSP-860-BLK

User Manual	EN
Bedienungsanleitung	DE
Mode d'emploi	FR
Manuale di Istruzioni	IT
Manual de Usuario	ES

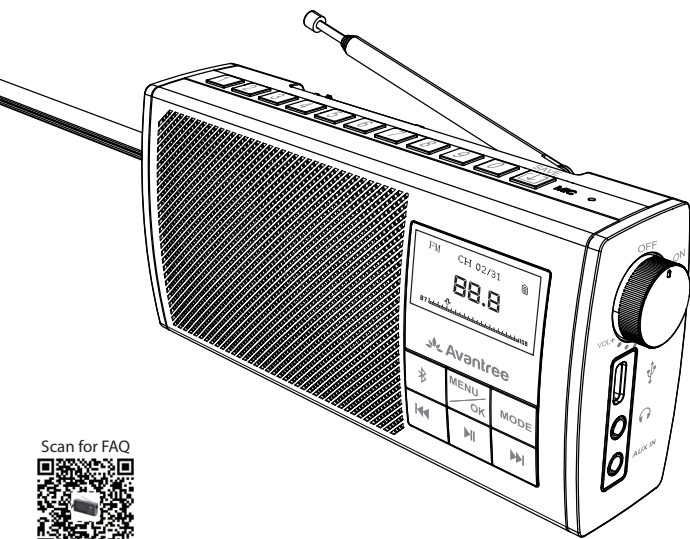

Support.avantree.com

What's in the box?

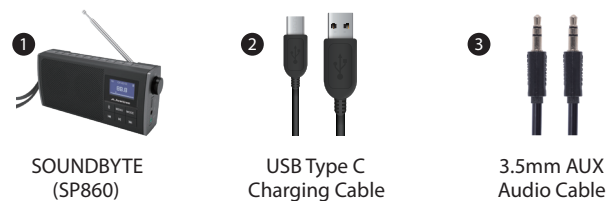

Basic Operation

Power ON	Rotate clockwise to ON
Power OFF	Rotate counterclockwise to OFF
Volume up	Rotate clockwise
Volume down	Rotate counterclockwise
Play/pause (Bluetooth mode) Mute/unmute(FM/wired speaker mode)	Press once
Next/Previous track/channel (Bluetooth/FM mode)	Press / once
Switch between FM/AUX mode	Press MODE once
Enter Bluetooth mode	Press once

Any questions? Please visit:

support.avantree.com

(User Manuals, FAQ, Video Tutorials and more)

Email support: support@avantree.com (Response Time: 1 working day)

Live chat: www.avantree.com

EN

1. Use as FM Radio

1.1 Turn on the Soundbyte - By default it will enter the last mode used. If this is not the FM radio mode press the MODE button once.

1.2 Select/search for FM channels

Manually select channel - Directly input the channel frequency using the number pad, e.g. for FM102.5, press the number sequence 1-0-2-5.

Auto-search for channels - Press once, then press to select "Auto-search", now press again to confirm and start auto-search. It will now search and auto save all available channels. Press the / to choose different channels.

1.3 Save your favorite channels

Save channels to number pad for quick access - Find local FM channels as described above, then save any channel for quick access by pressing and holding until the screen displays "channel saved". Channels are assigned to the number pad buttons in sequential order 1, 2, 3, ... 15. You can save up to 15 channels.

Play the saved channels - Press the corresponding number pad button (for channels 10-15, press 1 followed by 0-5). Or you can press once, the screen will display "Show saved channels", then press the / to choose the desired channel.

Delete saved channel - While playing channel, press and hold until the LCD screen displays "channel deleted". Now the saved channel is deleted from your saved channel list.

Exit the saved channel list - From the saved channel list, press and the LCD screen will display "Exit saved list" and return to main menu.

2. Use as Bluetooth Speaker

Pair and connect

Click once for Bluetooth mode, then activate Bluetooth on your device (i.e. phone, tablet, laptop etc.) and search for "Avantree Soundbyte" to pair and connect.

To reconnect

Each time you turn it on, the Soundbyte should automatically reconnect to the last connected device. If not, either click to manually reconnect or select "Avantree Soundbyte" on your device.

Basic Bluetooth operation

Manually reconnect	Press once
Disconnect	Press & hold for 2 seconds
Answer/end a call	Press once
Reject a call	Press for 2 seconds

3. Use as Wired Speaker

Turn the Soundbyte on, then plug the AUX 3.5mm audio cable into the (light green) audio port labeled "AUX IN". Now you can use the Soundbyte as a wired speaker.

4. Charging

Please charge the Soundbyte if you hear the "low battery" voice prompt. You can charge using any standard USB charger with 5V/ 1A output via the Type - C charging cable included.

The battery icon on the LCD screen will flash while charging and stop once charging is complete. It takes about 3 hours to fully charge the Soundbyte and you can still use it normally while it's charging.(N.B. You can also charge via a computer USB port but the charging time may be longer.)

5. Factory Reset

Factory resetting the Soundbyte will clear all the FM channels saved as well as its Bluetooth pairing history.

To reset, power on the device then press & hold the button for 2 seconds to enter "System Settings". Press to select "Factory Reset", then press again to confirm.

6. MENU Functions

FM mode - Press once to enter the settings interface

Equalizer	
Auto-search	Natural/
Delete	Rock/
Delete all	Pop/
Return	Classic/
	Jazz/
	Soft/
	Return

Bluetooth mode - Press once to enter the settings interface

Equalizer	
Return	Natural/
	Rock/
	Pop/
	Classic/
	Jazz/
	Soft/
	Return

System Setting - Press & Hold to enter the settings interface

Backlight	
Contrast	0 sec/
Voice Settings	10 sec/
Factory Reset	30 sec/
Firmware Version	1 min/
Return	2 min/
	5 min/
	10 min/
	return

Remarks:

To exit the settings interface at any time, press to select "Return" then press .

Specifications:

- BT Version: 5.0
- Operating range: 30ft/10m
- Operating time: 15hrs
- Charging voltage: 5V /1A
- Battery: 18650 lithium rechargeable 2200mAh battery
- Supported profiles: A2DP, AVRCP, HFP
- Frequency range: 160Hz - 20KHz
- FM frequency range: 87MHz - 108MHz
- Driver size: 40mm
- Product size: 156.2 x 71 x 37.5mm
- Net weight: 265g

1. Benutzen als FM Radio

1. Soundbyte einschalten - Der zuletzt verwendete Modus wird automatisch aktiviert. Wenn dies nicht der FM - Radiomodus ist, drücken Sie einmal die MODE t- Taste.

1.2 Auswahl/Suche der FM Sender

Sender manuell auswählen - Geben Sie die Kanalfrequenz direkt über den Nummernblock ein, z.b drücken Sie für FM102.5 die Nummernfolge 1-0-2-5.

Automatische Suche nach Sendern - Drücken Sie einmal und dann um die „Auto-Suche“ auszuwählen. Drücken Sie nun erneut , um die automatische Suche zu bestätigen und zu starten. Es werden nun alle verfügbaren Kanäle gesucht und automatisch gespeichert. Drücken Sie die Taste / , um verschiedene Sender auszuwählen.

1.3 Sender speichern

Speichern von Sendern auf dem Nummernblock für den schnellen Zugriff - Suchen Sie wie oben beschrieben nach lokalen FM-Sendern und speichern Sie dann jeden Kanal für den schnellen Zugriff, indem Sie gedrückt halten, bis auf dem Bildschirm „Channel saved“ angezeigt wird. Die Sender werden den Zifferntasten in der Reihenfolge 1, 2, 3, ... 15 zugewiesen. Sie können bis zu 15 Kanäle speichern.

Gespeicherte Sender abspielen - PDrücken Sie die entsprechende Zifferntaste (für die Kanäle 10-15 drücken Sie 1 gefolgt von 0-5). Oder Sie können einmal drücken. Auf dem Bildschirm wird "Show saved channels" angezeigt. Drücken Sie dann / , um den gewünschten Sender auszuwählen.

Gespeicherte Sender löschen - Halten Sie während der Wiedergabe des Senders gedrückt, bis auf dem LCD - Bildschirm „Channel deleted“ angezeigt wird. Jetzt wird der gespeicherte Kanal aus Ihrer Liste der gespeicherten Kanäle gelöscht.

Verlassen der gespeicherten Senderliste - Drücken Sie in der Liste der gespeicherten Sender und auf dem LCD - Bildschirm wird „Exit saved list“ angezeigt und Sie werden zum Hauptmenü zurückgehen.

2. Als Bluetoothlautsprecher

Koppeln und verbinden

Klicken Sie einmal für den Bluetooth-Modus, aktivieren Sie dann Bluetooth auf Ihrem Gerät (z. B. Telefon, Tablet, Laptop usw.) und suchen Sie nach „Avantree Soundbyte“ zum Koppeln und Verbinden.

Zum erneuten Verbinden

EBei jedem Einschalten sollte sich das Soundbyte automatisch wieder mit dem zuletzt angeschlossenen Gerät verbinden. Wenn nicht, klicken Sie entweder , um die Verbindung manuell wiederherzustellen, oder wählen Sie "Avantree Soundbyte" auf Ihrem Gerät aus.

Bluetoothbedienung

Wiederverbinden	einmal drücken
Wiederverbinden	für 2 Sekunden gedrückt halten
Anruf antworten / beenden	einmal drücken
Anruf ablehnen	für 2 Sekunden gedrückt halten

3. Als Kabelgebundener-Lautsprecher

Schalten Sie das Soundbyte ein und stecken Sie das AUX 3,5 - mm - Audiokabel in den (hellgrünen) Audioanschluss mit der Bezeichnung „AUX IN“ ein. Jetzt können Sie den Soundbyte als kabelgebundenen Lautsprecher verwenden.

4. Aufladen

Bitte laden Sie das Soundbyte auf, wenn Sie die Sprachaufforderung „low Battery“ hören. Sie können es mit jedem Standard-USB-Ladegerät mit 5 V / 1A - Ausgang über das mitgelieferte Ladekabel Typ C aufladen. Das Akkusymbol auf dem LCD - Bildschirm blinkt während des Ladevorgangs und stoppt nach Abschluss des Ladevorgangs. Das vollständige Aufladen des Soundbytes dauert ca. 3 Stunden. Sie können es während des Ladevorgangs weiterhin normal verwenden. (NB. Sie können auch über einen Computer-USB-Anschluss aufladen, die Ladezeit kann jedoch länger sein.)

5. Rücksetzen

DurchsRücksetzen des Soundbytes auf die Werkseinstellungen werden alle gespeicherten FM-Kanäle sowie der Bluetooth-Kopplungsverlauf gelöscht.

Schalten Sie das Gerät zum Rücksetzen ein und halten Sie die Taste 2 Sekunden lang gedrückt, um die „Systemeinstellungen“ aufzurufen. Drücken Sie , um „Factory Reset“ auszuwählen, und drücken Sie dann zur Bestätigung erneut .

6. MENU Functions

FM-Modus - Drücken Sie einmal , um die Einstellungsoberfläche aufzurufen

Equalizer	
Automatische Suche	Natural/
Löschen	Rock/
Alles löschen	Pop/
Zurück	Klassik/
	Jazz/
	Soft/
	Zurück

Bluetooth-Modus - Drücken Sie einmal , um die Einstellungsoberfläche aufzurufen

Equalizer	
Zurück	Natural/
	Rock/
	Pop/
	Klassik/
	Jazz/
	Soft/
	Zurück

Systemeinstellung - Halten Sie gedrückt, um die Einstellungsoberfläche aufzurufen

Hintergrundbeleuchtung	
Kontrast	0 s/
Stimmeneinstellungen	10 s/
Werkseinstellungen	30 s/
Firmware Version	1 min/
Zurück	2 min/
	5 min/
	10 min/
	Zurück

Bemerkungen:

Um die Einstellungsoberfläche jederzeit zu verlassen, drücken Sie , um „Return“ auszuwählen, und drücken Sie dann .

1. Utilisation Radio FM

1.1 Allumez le Soundbyte - Par défaut, il entrera dans le dernier mode utilisé. S'il ne passe pas en mode radio FM, appuyez une fois sur le bouton MODE.

1.2 Sélection/recherche des canaux FM

Sélectionner manuellement une station - Entrez directement la fréquence du canal à l'aide du pavé numérique, ex. FM102.5, appuyez sur la séquence de chiffres 1-0-2-5.

FR

